

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

OMB 3067-0077 Expires: July 1984

ELEVATION CERTIFICATE

This form is to be used for: 1) New/Emergency Program construction in Special Flood Hazard Areas; 2) Pre-FIRM construction after September 30, 1982; 3) Post-FIRM construction; and, 4) Other buildings rated as Post-FIRM rules.

Gasparino & Sons, Inc.

704 Gasparin o Court, Seffner, Fla. 33584

BUILDING OWNER'S

ADDRESS

NAME 116 15th Street North, Belleair Beach, Fla. (Lot "K", Block 15 of BELLEAIR

PROPERTY LOCATION (Lot and Block numbers and address if available)

BEACH SUBDIVISION, UNIT "D", rec'd in PB 25, Pgs 6 & 7, Pinellas County, Fla.

I certify that the information on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. code, Section 1001.

COMMUNITY NO. PANEL NO.	SUFFIX D	DATE OF FIRM	FIRM ZONE	DATE OF CONSTR.	BASE FLOOD ELEV.	BUILDING IS
125089 0002		3/2/83	A-11	5 /83	(In AO Zone, use depth) 10 MSL	■ New/Emergenc □ Pre-FIRM Reg. □ Post-FIRM Reg
ordinance. The	certifier ma ft, NGVD. F	y rely on con Failure to con	nmunity reco struct the bu	ords. The lowest fluilding at this eleva	oor (including basem	community's flood plain ent) will be at an elevation uilding in violation of
	ed on elevation	ion data and	visual inspec	in compliance wit tion or other reason the community.		ood plain management
ES NO The mobile hor community's flo	ne located a	at the address anagement or	described a	bove has been tie in compliance wit	d down (anchored) in the NFIP Specificat	compliance with the ions.
MOBILE HOME MAKE		MODEL	YR. (OF MANUFACTU	RE SERIAL N	NO. DIMENSIONS
Community Permit Officia	l or Registe	ered Professio			rveyor)	
AME				ADDRESS		
TLE		CITY			STATE	ZIP
IGNATURE				DATE	PHONE	Harris Marie Land
CTION II ELEVATION	CERTIFICA		ified by a Located tect, or Surv		rmit Official or a Regi	stered Professional Engine
at a	an elevation elevation of I certify tha at an eleva	of 5.3	feet, NGVD. feet, NGVD. g at the properties, feet,	/D (mean sea leverage F) Carage F erty location described to the control of the	el) and the average gor Under Const Loor Elev. = 6 lbed above has the bo	rade at the building site is = Elev. 10.07 77 ttom of the lowest floor bea
at a an RM ZONES V, V1-V30:	an elevation of levation of levation of at an eleva is at an eleva	at the building ation of	feet, NGVD. g at the proper feet, feet, feet	/D (mean sea leve # Wood Floor Garage F. erty location described in the work of the work o	el) and the average given under Const Loor Flev. 6 ibed above has the bolevel), and the average	rade at the building site is = Elev. 10.07 77 ttom of the lowest floor beage grade at the building s
at a an RM ZONES V, V1-V30:	I certify tha at an eleva is at an eleva	at the building ation of	feet, NGVD. g at the prope feet, feet PROGRAM:	/D (mean sea leve wood Floor Garage Floor NGVD (mean sea to, NGVD.	el) and the average given under Const Loor Flev. 6 ibed above has the bolevel), and the average	rade at the building site is = Elev. 10.07 77 ttom of the lowest floor beage grade at the building s
at a an RM ZONES V, V1-V30: RM ZONES A, A99, AO has to t	I certify tha at an elevation is at an elevation of the control of	at the building ation of	feet, NGVD. g at the proper feet, feet PROGRAM: on of feet, NGVI	VD (mean sea leve Wood Floor Garage F. erty location descr NGVD (mean seat, NGVD. I certify that the feet, NGVD.	el) and the average gor Under Const Loor Elev. = 6 libed above has the bolevel), and the average building at the proper The elevation of the	ttom of the lowest floor bea ge grade at the building s rty location described abo highest adjacent grade ne
at a an ERM ZONES V, V1-V30: RM ZONES A, A99, AO, has to t ECTION III FLOODPRO certify to the best of my alls substantially imperment hydrodynamic loads a crees associated with the YES NO In the	I certify tha at an elevation of at all at an elevation of at a elevation	at the building ation of evation of MERGENCY floor elevation is information, e passage of buoyancy t flooding, will	program: progra	I certify that the feet, NGVD. I certify that the feet, NGVD. I comby a Registered that the building is tructural componer caused by the floodproofing the componer of the componer caused by the floodproofing the caused by the caused by the caused by the floodproofing the caused by	building at the proper The elevation of the elevation of the designed so that the the thick having the capal cool depths, pressures the achieved with human end of the elevation	rade at the building site is = Elev. 10.07 ttom of the lowest floor beage grade at the building s rty location described aborables adjacent grade new error Architect) e building is watertight, we building in many an intervention?
RM ZONES V, V1-V30: RM ZONES A, A99, AO, has to t ECTION III FLOODPRO certify to the best of my alls substantially imperment hydrodynamic loads a rces associated with the YES NO In the Cure doc	I certify tha at an elevation of at an elevation of at an elevation of at an elevation at an elevation of at	at the building ation of	pat the proper feet, NGVD. grat the proper feet, feet PROGRAM: on of feet, NGVI N (Certification and belief, water and shat would be that water wen prior to the feet, NGVI I this degree	I certify that the feet, NGVD. I certify that the feet, NGVD. I comby a Registere that the building it tructural compone caused by the flood proofing the flood to prevented the flood to prevented to the flood to prevented the flood to prevented to the flood to prevented the flood the flood to prevented the flood to prevented the flood to prevented the flood the f	building at the proper The elevation of the elevation of the elevation of the elevation depths, pressures the achieved with human when floods up to	rade at the building site is = Elev. 10.07 ttom of the lowest floor beautiful to the building site is get grade at the building site is a series of the building site is a series of the building site is a series of the building is watertight, we build in the building is watertight.
at a an a	I certify tha at an elevation of at an elevation of at an elevation of at an elevation at an elevation of at	at the building ation of evation of evation of evation of evation of evation is extracted by the state of the	pat the proper feet, NGVD. g at the proper feet, feet PROGRAM: n of feet, NGVI N (Certification and belief, water and shat would be that water were prior to the das a reside points cannot feet, not feet	carego F wood Floo Garago F erty location descr NGVD (mean sea t, NGVD. I certify that the feet, NGVD.	building at the proper The elevation of	rade at the building site is = Elev. 10.07 To the lowest floor being ge grade at the building site is rety location described about highest adjacent grade new property of resisting hydrostas velocities, impact and upon an intervention? The base flood level octoolting metal shields over
at a an a	I certify tha at an elevation of at an elevation of at an elevation of at an elevation at an elevation of at	at the building ation of	pat the proper feet, NGVD. g at the proper feet, feet PROGRAM: n of feet, NGVI N (Certification and belief, water and shat would be that water were prior to the das a reside points cannot feet, not feet	carage F. erty location descr NGVD (mean sea t, NGVD. I certify that the feet, NGVD.	and the average gor Under Const loor Flev. = 6 libed above has the boulevel), and the average building at the proper The elevation of the d Professional Engine as designed so that the lents having the capal lood depths, pressures the achieved with human g when floods up to t entry of water (e.g., lating purposes and the lertificates.	rade at the building site is = Elev. 10.07 To the lowest floor being grade at the building site is rety location described about highest adjacent grade new properties of the building is watertight, we building in the resistance of the building is watertight, we building is watertight.
at a an RM ZONES V, V1-V30: RM ZONES A, A99, AO has to t ECTION III FLOODPRO Certify to the best of my alls substantially impermed hydrodynamic loads a roes associated with the YES NO In the Curres of NO Will the answer to both quest completed and certified inserting RM ZONES A, A1-A30, V	I certify tha at an elevation of at an elevation of at an elevation of at an elevation at an elevation of at	at the building ation of sevation sevation, information, se passage of buoyancy to flooding, will sention means assures are takedows). In the flooding sevation of sevation of sevation of sevation means assures are takedows). In the flooding sevation of sev	pat the proper feet, NGVD. g at the proper feet, feet PROGRAM: n of feet, NGVI N (Certification and belief, water and shat would be that water were prior to the das a reside elevation and selevation selevation selevation selevation and selevation sele	carage F. erty location descr NGVD (mean sea t, NGVD. I certify that the feet, NGVD.	and the average gor Under Const loor Elev. = 6 libed above has the boulevel), and the average building at the proper The elevation of the d Professional Engine as designed so that the ents having the capal good depths, pressures the achieved with human and when floods up to t entry of water (e.g., atting purposes and the certificates. Floodproofed Elevation (Check One)	rade at the building site is = Elev. 10.07 77 ttom of the lowest floor being ge grade at the building site is rety location described about highest adjacent grade new property of the building is watertight, we building in the result of the base flood level octobolting metal shields over the actual lowest floor must be
at a an RM ZONES V, V1-V30: RM ZONES A, A99, AO, has to t ECTION III FLOODPRO certify to the best of my alls substantially imperm and hydrodynamic loads a cross associated with the YES NO In the (Hugur door yes) NO Will the answer to both quest ompleted and certified ins RM ZONES A, A1-A30, VHIS CERTIFICATION IS ERTIFIER'S NAME	I certify that at an elevation of at an elevation of at an elevation of at an elevation at an elevation of a	at the building ation of sevation sevation, information, se passage of buoyancy to flooding, will sention means asures are taked dows). The flooding sevation of sevation means asures are taked ows). The flooding of the floodin	pat the proper feet, NGVD. g at the proper feet, feet PROGRAM: n of feet, NGVI N (Certification and belief, if water and shat would be that water wen prior to the das a reside point of cannot believation and believatio	carego F. erty location descr NGVD (mean sea t, NGVD. I certify that the feet, NGVD. ion by a Registere that the building i tructural compone caused by the fl of floodproofing to interpretable the flood to preven ence? t be credited for ra d floodproofing co Certified for ETIONS II AND III NAME	and the average gor Under Const loor Elev. = 6 libed above has the bo- level), and the average building at the proper The elevation of the d Professional Engine is designed so that the ents having the capal good depths, pressures the achieved with humang when floods up to t entry of water (e.g., ating purposes and the ertificates. Floodproofed Elevation (Check One)	rade at the building site is = Elev. 10.07 77 ttom of the lowest floor begge grade at the building sorty location described about highest adjacent grade new error Architect) be building is watertight, we build of resisting hydrostates velocities, impact and upon intervention? the base flood level octolling metal shields over the actual lowest floor must the isfeet, (NGV). ICENSE NO. (or Affix Seal
RM ZONES V, V1-V30: RM ZONES A, A99, AO, has to t ECTION III FLOODPRO certify to the best of my alls substantially imperm and hydrodynamic loads a process associated with the YES NO In the Currence of the County of the answer to both quest completed and certified instance of the County of the Albert of the County of t	I certify that at an elevation of at an elevation of at an elevation of at an elevation at an elevation of a	at the building ation of sevation sevation, information, se passage of buoyancy to flooding, will sention means asures are taked dows). The flooding sevation of sevation means asures are taked ows). The flooding of the floodin	feet, NGVD. g at the proper feet, feet feet, feet feet, nGVI. PROGRAM: In of feet, nGVI. N (Certification and belief, swater and shat would be that water wen prior to the feet feet feet feet feet feet feet	carage F. erty location descr NGVD (mean sea t, NGVD. I certify that the feet, NGVD. ion by a Registere that the building i tructural compone e caused by the fl of floodproofing to ine flood to preven the credited for re d floodproofing co Certified f	and the average gor Under Const loor Elev. = 6 libed above has the bo- level), and the average building at the proper The elevation of the d Professional Engine is designed so that the ents having the capal good depths, pressures the achieved with humang when floods up to t entry of water (e.g., ating purposes and the ertificates. Floodproofed Elevation (Check One)	rade at the building site is = Elev. 10.07 77 ttom of the lowest floor begge grade at the building sorty location described about highest adjacent grade new error Architect) be building is watertight, wo boility of resisting hydrostates velocities, impact and upper an intervention? the base flood level octolling metal shields over the actual lowest floor must this
at a an IRM ZONES V, V1-V30: RM ZONES A, A99, AO, has to t ECTION III FLOODPRO certify to the best of my alls substantially imperment hydrodynamic loads a crees associated with the YES NO In the Curdoo YES NO Will	I certify that at an elevation of at an elevation o	at the building ation of sevation sevation, information, se passage of buoyancy to flooding, will sention means asures are taked dows). The flooding sevation of sevation means asures are taked ows). The flooding of the floodin	g at the proper feet, NGVD. g at the proper feet, feet PROGRAM: In of feet, NGVI N (Certification and belief, if water and shat would be that water were prior to the feet as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevate and belief and as a reside of ing cannot elevate and belief and as a reside of ing cannot elevate and belief and as a reside of ing cannot elevate and as a reside	certy location described by the feet, NGVD. I certify that th	and the average gor Under Const loor Elev. = 6 libed above has the bo- level), and the average building at the proper The elevation of the d Professional Engine is designed so that the ents having the capal good depths, pressures the achieved with humang when floods up to t entry of water (e.g., ating purposes and the ertificates. Floodproofed Elevation (Check One)	rade at the building site is = Elev. 10.07 77 ttom of the lowest floor beage grade at the building s rty location described about highest adjacent grade new error Architect) e building is watertight, we builty of resisting hydrostates velocities, impact and up an intervention? the base flood level octolling metal shields over e actual lowest floor must a continuous feet, (NGVI) ICENSE NO. (or Affix Seal Reg. L.S. #2592
at a an ERM ZONES V, V1-V30: RM ZONES A, A99, AO has to t ECTION III FLOODPRO Certify to the best of my alls substantially impermed hydrodynamic loads a process associated with the YES NO In 1 (Hickory 2007) NO WII the answer to both quest completed and certified instances associated with the SERTIFICATION IS ERTIFIER'S NAME Richard R. Skoln ITLE	I certify that at an elevation of at an elevation o	at the building ation of wation elevation is wation means as were are taked ows). The flooding, will ention means as were are taked ows). The flooding wation of the wation means as were are taked ows). The flooding wation is the flooding wation means as were are taked ows). The flooding wation is the flooding of the flooding wation is the flooding of the flooding wation.	g at the proper feet, NGVD. g at the proper feet, feet PROGRAM: In of feet, NGVI N (Certification and belief, if water and shat would be that water were prior to the feet as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevation and belief and as a reside of ing cannot elevate and belief and as a reside of ing cannot elevate and belief and as a reside of ing cannot elevate and belief and as a reside of ing cannot elevate and as a reside	carage F. erty location descr NGVD (mean sea t, NGVD. I certify that the feet, NGVD. Compone that the building i tructural compone caused by the fl of floodproofing by fill enter the building the flood to preven the credited for ra d floodproofing componence? The credited for ra d floodproofing componence? The credited for ra d floodproofing componence. Certified for ra d floodproofing componence.	and the average gor Under Const loor Elev. = 6 libed above has the bo- level), and the average building at the proper The elevation of the d Professional Engine is designed so that the ents having the capal good depths, pressures the achieved with humang when floods up to t entry of water (e.g., ating purposes and the ertificates. Floodproofed Elevation (Check One)	rade at the building site is = Elev. 10.07 77 ttom of the lowest floor beage grade at the building sorty location described abordinghest adjacent grade not highest adjacent grade not be building is watertight, wo bility of resisting hydrostates velocities, impact and upon an intervention? The base flood level octobolting metal shields over the actual lowest floor must be is

The insurance agent should attach the original copy of the completed form to the flood insurance policy application, the second copy should be supplied to the policyholder and the third copy retained by the agent INSURANCE AGENTS MAY ORDER THIS FORM

New/Emergency Program Construction:

For the purposes of determining insurance rates, buildings for which the start of construction or substantial improvement commenced after September 30, 1982, are New/Emergency buildings.

Pre-FIRM Construction:

For the purposes of determining insurance rates, buildings for which the start of construction or substantial improvement was on or before December 31, 1974 or the effective date of the Initial Flood Insurance Rate Map (date printed on community FIRM), whichever is later. Special Note: If an approved building permit is dated prior to December 31, 1974, construction must have commenced not later than 180 days after the date of the approved building permit. "Existing Construction" and "Pre-FIRM Construction" have identical meanings for the purposes of the National Flood Insurance Program.

Post-FIRM Construction:

For insurance rating purposes buildings for which the start of construction or substantial improvement commenced after December 31, 1974 or the effective date of the initial Flood Insurance Rate Map (date printed on community FIRM), whichever is later. "New Construction" and "Post-FIRM Construction" have identical meanings for the purposes of the National Flood Insurance Program.

Substantial Improvement:

Any repair, reconstruction, or improvement of a building, the cost of which equals or exceeds 50 percent of the market value of the building either (a) before the improvement or repair is started, or (b) if the building has been damaged, and is being restored the market value before the damage occurred. For Flood Insurance Program purposes substantial improvement is started when the first alteration of any wall seiling, floor, or other structural part of the building commences, whether or not that alteration affects the external dimensions of the structure. However, the term does not include either any project for health, sanitary, or safety code specifications which are solely necessary to assure safe living conditions; or any alteration of a building listed on the National Register of Historic Places or a State Inventory of Historic Places.

Lowest Floor - The lowest floor is the lowest floor (including basement) of the enclosed area. The following modifications of the lowest floor definition are permitted in order to meet community permit practices:


- (1) In Zones A, AO, AH, A1-A30, B, C, D, and Emergency Program areas which are not oceanside building sites, the following exceptions apply:
- (a) The floor of an unfinished enclosed area at ground level or above, which is a crawl space, or space within the foundation walls, usable as areas for building maintenance, access, parking vehicles, or storing of articles and maintenance equipment (not attached to the building) used in connection with the premises is not considered the building's lowest floor if the walls of the unfinished enclosed areas are constructed with openings (such as with parallel sheer walls, open lattice walls, discontinuous foundation walls, and combinations thereof) to facilitate the unimpeded movement of flood waters or the walls are breakaway walls.
- the walls are breakaway walls.

 (b) The floor of an attached unfinished garage used for parking vehicles and storing articles and maintenance equipment used in connection with the premises and not attached to the building is not considered the building's lowest floor if the walls of the unfinished enclosed areas are constructed with openings (such as with parallel sheer walls, open lattice walls, discontinuous foundation walls, or combinations thereof) to facilitate the unimpeded movement of flood waters or the walls are breakaway walls.

The unimpeded movement of flood waters is imperative to equalize the hydrostatic pressure inside and outside of the walls of the building and/or garage.

- (2) In Zones V and V1-V30; and Emergency Program areas which are oceanside building lots, the following exceptions apply:
- (a) For flood plain management purposes, the floor of an unfinished enclosed area is not considered the building's lowest floor if the area's walls are constructed as breakaway walls. However, for insurance rating purposes:
- (i) The floor of an unfinished enclosed area less than 300 square feet is not considered the building's lowest floor if the walls are breakaway walls.
- (ii) The floor of an unfinished enclosed area equal to or greater than 300 square feet is considered the building's lowest floor even if the walls are breakaway walls.
- (b) The floor of an unfinished enclosed area with walls made of insect screening or open wood constructed break-away lattice work (regardless of the size of the area enclosed) is not considered the building's lowest floor.

Lowest Floor Elevation — The lowest floor elevation is the elevation of the bottom of the floor beam of the lowest floor in Zones V, V1-V30. In all other zones, the lowest floor elevation is the elevation of the top of the lowest floor.

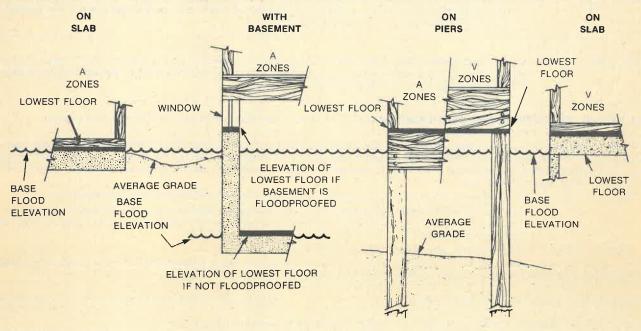

NOTE

A Zones - A, AO, AH, A1-A30, A99, Emergency Program other than Oceanside Building Sites

V Zones - V, V1-V30, Emergency Program Oceanside Building Sites (beach areas subject to wave action during severe storms)

Base Flood Elevation – Flood plain management requirements including the Base Flood Elevation are shown on the FIRM for Zones AH, A1-A30, V1-V30. For FIRM Zone A, V, and Emergency Program Special Flood Hazard Areas the community permit official or the builder has estimated this elevation by the reasonable interpretation of available data. Enter that estimated elevation in the space provided in Section I of the Elevation Certification for Base Flood Elevation. If this community permit official or the builder has not selected an estimated Base Flood Elevation, enter N.A.