U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATEImportant: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

	SECT	TION A - PROPERTY	Y INFORI	MATION		FOR INSUF	RANCE COMPANY USE
A1. Building Owner's Name Vic and Amy Shull					Policy Num	ber:	
A2. Building Street Ad Box No. 2235 Donato Drive	ddress (ind	cluding Apt., Unit, Sui	te, and/o	r Bldg. N o.) c	r P.O. Route and	Company N	IAIC Number:
City Belleair Beach		min Perce	1	State Florida	100	ZIP Code 33786	decide repeate
A3. Property Descript Lot 81 - Bellevue Esta						THE PERSON NAMED IN COLUMN 2 I	Avge i
A4. Building Use (e.g	., Residen	tial, Non-Residential,	Addition,	, Accessory,	etc.) Resident	al	
A5. Latitude/Longitud	le: Lat. 27	7.92873°N	Long8	32.83725°S	Horizonta	al Datum: NAD	1927 × NAD 1983
A6. Attach at least 2	photograp	hs of the building if th	e Certific	ate is being	used to obtain floo	od insurance.	
A7. Building Diagram	Number	1B					er partieur i
A8. For a building wit	h a crawls	pace or enclosure(s):					a rest frage
a) Square footag	ge of crawl	space or enclosure(s)		N/A sq ft		A ALP HIS
b) Number of per	manent flo	ood openings in the c	rawlspace	e or enclosur	e(s) within 1.0 foo	t above adjacent gr	ade N/A
c) Total net area	of flood or	penings in A8.b	-4	N/A' sq i	n		
d) Engineered flo	ood openir	gs? Yes X	No	i			C 7 LEVE
A9. For a building with	n an attach				N. Davidson		
many of the second		and the second resident		485.00 sq f	Y 4		an exhibition of
a) Square footag				315 I		The State Act of the Con-	ALC: NO PERSONS
		ood openings in the a				ljacent grade 3	and the second
c) Total net area	of flood op	penings in A9.b	- 1 8	1200.00 so	in -		and Form
d) Engineered flo	ood openin	gs? 🗶 Yes 🗌	No	W.W.			20-400 (1 6/6)
Car Shark	SE	CTION B - FLOOD	INSURA	NCE RATE	MAP (FIRM) IN	FORMATION	
B1. NFIP Community Belleair Beach - 1250		Community Number		B2. County Pinellas	Name		B3. State Florida
Number	35. Suffix	B6. FIRM Index Date	Eff Re	RM Panel ective/ vised Date	B8. Flood Zone(s)		Elevation(s) se Base Flood Depth)
12103C0112	1	08-24-2021	08-24-	2021	AE	8.0'	-440-311
B10. Indicate the sou		Base Flood Elevation Community Dete				d in Item B9:	
B11. Indicate elevation	on datum ı	used for BFE in Item	B9: 🗌 N	IGVD 1929	⋈ NAV D 1988	Other/Source:	1
B12. Is the building I	ocated in a	a Coastal Barrier Res	ources S	ystem (CBR	S) area or Otherw	ise Protected Area ((OPA)? Yes X No
Designation Da	ite:	ar out of the] CBRS	□ ОРА			
- 1	ŭ						

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corres	sponding information from Se	ection A.	FOR I	NSURANO	CE COMPANY USE
Building Street Address (including Apt., Unit, Suit 2235 Donato Drive	te, and/or Bldg. No.) or P.O. Ro	ute and Box No.	Policy	Number:	
City Belleair Beach		Code 786	Comp	any NAIC	Number
SECTION C - BUILI	DING ELEVATION INFORMA	TION (SURVEY R	EQUIRI	ED)	enginesis (A.)
*A new Elevation Certificate will be required	d when construction of the build	3			hed Construction
C2. Elevations – Zones A1–A30, AE, AH, A (w Complete Items C2.a–h below according to Benchmark Utilized: Pinellas County Map	the building diagram specified	in Item A7. In Puer			
Indicate elevation datum used for the eleva ☐ NGVD 1929 ☒ NAVD 1988 ☐ Datum used for building elevations must be	Other/Source:				š š
Datum used for building elevations must be	e the same as that used for the	DFE.	Ch	eck the me	easurement used.
a) Top of bottom floor (including basemen	t, crawlspace, or enclosure floor	r)	12.0	× feet	meters
b) Top of the next higher floor			N/A	× feet	meters
c) Bottom of the lowest horizontal structura	al member (V Zones only)	A LA GAMES A	N/A	× feet	meters
d) Attached garage (top of slab)			7.9	× feet	meters
e) Lowest elevation of machinery or equip (Describe type of equipment and location)	ment servicing the building on in Comments)		12.0		meters
f) Lowest adjacent (finished) grade next to	building (LAG)		7.7	\times feet	meters
g) Highest adjacent (finished) grade next t	o building (HAG)		8.2	× feet	meters
h) Lowest adjacent grade at lowest elevati structural support	on of deck or stairs, including	J. ast. 1	N/A		meters
SECTION D - SUR	VEYOR, ENGINEER, OR AR	CHITECT CERTIF	ICATIO	N	
This certification is to be signed and sealed by a I certify that the information on this Certificate re statement may be punishable by fine or impriso	a land surveyor, engineer, or are	chitect authorized by	y law to	certify elev	ration information. that any false
Were latitude and longitude in Section A provide			X	Check her	e in attachments
Certifier's Name	License Number		0	143, 70	Frei BA'
John O. Brendla	LS 4601	N 19 2	15/2	1. Our	14600
Title Surveyor			1	forme	-VJ/reverbe
Company Name	The second	1001 1-11-4	Profe	1) 1	ace Z >
John C. Brendla & Associates, Inc.			100	STA	eal /
Address 4015 82nd Avenue North		S. Santa		On LON	e e
City Pinellas Park	State Florida	ZIP Code 33781		OHUM	and Mappe
Signature 3.13 reve	Date 04-28-2023	Telephone (727) 576-7546	Ext. None		, -
Copy all pages of this En vation Certificate and all	attachments for (1) community o	fficial, (2) insurance	agent/co	mpany, an	d (3) building owner.
Comments including type of equipment and located on the North side of NOTE: The permit was issued prior to 08-24-20 09-03-2003, Flood Zone AE based flood elevation per vent for a total of 1200.00 square inches, - 10 Benchmark: Pinellas County Map #172 (Hall C), Latitude/Longitude derived from Google Earth	the house 121 on FIRM Map #12103C0112 on 10.0', - There are 3 Smart Ve CC-ES Evaluation Report is atta	ents in the Garage I ached.	Model #	1540-521 (

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corre	esponding information	on from Section A.		FOR INSURANCE CO	MPANY USE
Building Street Address (including Apt., Unit, Su 2235 Donato Drive	uite, and/or Bldg. No.)	or P.O. Route and Bo	x No.	Policy Number:	dita -
City	State	ZIP Code	i	Company NAIC Numb	er
Belleair Beach	Florida	33786			
SECTION E - BUILDI FOR		FORMATION (SURV		REQUIRED)	
For Zones AO and A (without BFE), complete Ito complete Sections A, B,and C. For Items E1–E4 enter meters.	ems E1–E5. If the Cei 4, use natural grade, i	rtificate is intended to f available. Check the	support a measuren	LOMA or LOMR-F requent used. In Puerto Ri	uest, co only,
E1. Provide elevation information for the following the highest adjacent grade (HAG) and the I a) Top of bottom floor (including basement	lowest adjacent grade		w whether	the elevation is above	or below
crawlspace, or enclosure) is b) Top of bottom floor (including basement	-	feet	meters	above or be	low the HAG.
crawlspace, or enclosure) is		feet	meters	above or be	low the LAG.
E2. For Building Diagrams 6–9 with permanent the next higher floor (elevation C2.b in	flood openings provid	ded in Section A Items	8 and/or	9 (see pages 1–2 of Ins	tructions),
the diagrams) of the building is		feet	meters	above or bel	ow the HAG.
E3. Attached garage (top of slab) is		feet	meters	above or bel	ow the HAG.
E4. Top of platform of machinery and/or equipm servicing the building is	nent	feet	meters	above or bel	ow the HAG.
E5. Zone AO only: If no flood depth number is a floodplain management ordinance?				ordance with the commertify this information in	
	1.711	m.			
SECTION F - PROPERT	Y OWNER (OR OWN	NER'S REPRESENTA	TIVE) CE	RIFICATION	
community-issued BFE) or Zone AO must sign has property Owner or Owner's Authorized Represe		in Sections A, B, and	E are corre	ect to the best of my kn	owledge.
Address	- 200	City	Sta	te ZIP	Code
Signature		Date	Tele	ephone	
Comments				W , o	
4.3					
4					

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

MPORTANT: In these spaces, copy	the corresponding information fron	n Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Ap 235 Donato Drive	ot., Unit, Suite, and/or Bldg. No.) or P.O	. Route and Box No.	Policy Number:
ity elleair Beach	State Florida	ZIP Code 33786	Company NAIC Number
	SECTION G - COMMUNITY INFOR	MATION (OPTIONAL)	3 18 18 18 18 18 18 18 18 18 18 18 18 18
sections A, B, C (or E), and G of this sed in Items G8–G10. In Puerto Ric The information in Section engineer, or architect who data in the Comments area	C was taken from other documentation is authorized by law to certify elevation	plicable item(s) and sign that has been signed information. (Indicate	and sealed by a licensed surveyor, the source and date of the elevation
3. The following information (Items G4–G10) is provided for commun	Complete IV Fall	ravis diproprocession.
Permit Number	G5. Date Permit Issued	G6.	Date Certificate of Compliance/Occupancy Issued
 8. Elevation of as-built lowest floor of the building: 9. BFE or (in Zone AO) depth of formunity's design flood elevation. 	looding at the building site:		Datum
ocal Official's Name	Title	7 - 4	Dutain
ocal Official 3 Name			
ommunity Name	Tel	ephone	
ignature	Dat	e	
'omments (including type of equipm	nent and location, per C2(e), if applicable	(a)	
*			
8			
			Check here if attachments

BUILDING PHOTOGRAPHS

OMB No. 1660-0008

Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

See Instructions for Item A6.

MPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE	
Building Street Address (including A 2235 Donato Drive	Apt., Unit, Suite, and/or Bldg. No.)	or P.O. Route and Box No.	Policy Number:	
City Belleair Beach	State Florida	ZIP Code 33786	Company NAIC Number	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



FRONT VIEW Photo One Caption

Clear Photo One



REAR VIEW Photo Two Caption

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, co	FOR INSURANCE COMPANY USE		
Building Street Address (including 2235 Donato Drive	Policy Number:		
City	State	ZIP Code	Company NAIC Number
Belleair Beach	Florida	33786	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

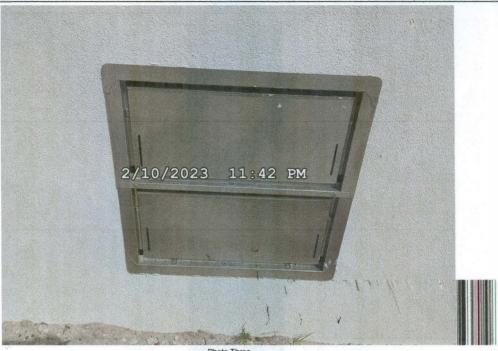


Photo Three

Photo Three Caption VENTS VIEW

Clear Photo Three




Photo Four Caption EQUIPMENT VIEW

Clear Photo Four

Photo Four







Specialty code recognition



www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

ICC-ES Evaluation Report Reissued February 2023 ESR-2074

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570: #1540-574: #1540-524: #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2021 and 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing This report is subject to renewal February 2025.

the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with 1/4-inch-by-1/4-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 - 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the

- manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION


- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC.
19 MANTUA ROAD
MOUNT ROYAL, NEW JERSEY 08061
(877) 441-8368
www.smartvent.com
info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)	
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200	
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200	
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200	
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200	
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200	
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200	
SmartVENT® Stacker	1540-511	16" X 16"	400	
FloodVent [®] Stacker	1540-521	16" X 16"	400	

For SI: 1 inch = 25.4 mm; 1 square foot = m²

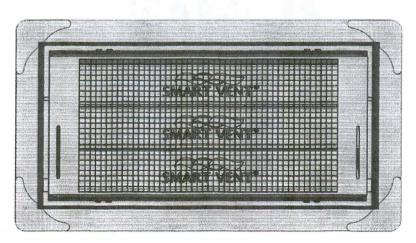

EICHDE 4 CMADT VENT. MODEL 4540 540

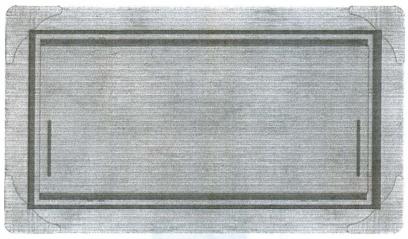


FIGURE 2—SMART VENT MODEL 1540-520

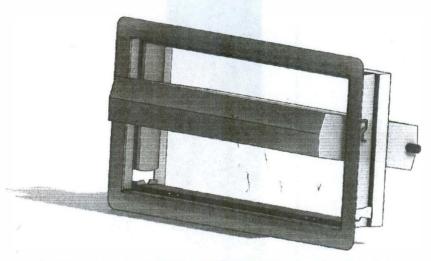


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

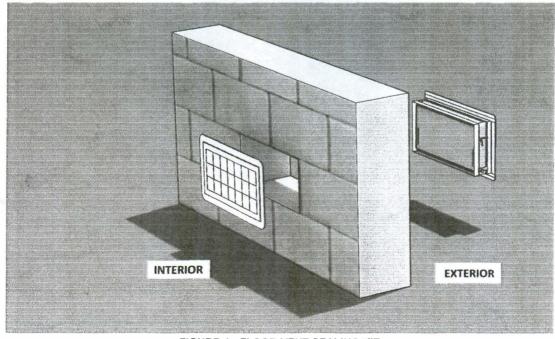


FIGURE 4—FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2023

This report is subject to renewal February 2025.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code editions:

■ 2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2019 CBC Chapter 12, provided the design and installation are in accordance with the 2018 *International Building Code*® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

2.1.1 OSHPD:

The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.

2.1.2 DSA:

The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2019 CRC, provided the design and installation are in accordance with the 2018 *International Residential Code*® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2023.

40F 5





ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2023

This report is subject to renewal February 2025.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the Florida Building Code—Building and the Florida Building Code—Residential, provided the design requirements are determined in accordance with the Florida Building Code—Building or the Florida Building Code—Residential, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-2074 for 2018 International Building Code® meet the requirements of the Florida Building Code—Building or the Florida Building Code—Residential, as applicable.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2023.



